




Andy Schreier (Autor)

**Distributed Brillouin sensor in polymer optical fibers  
utilizing BOFDA**

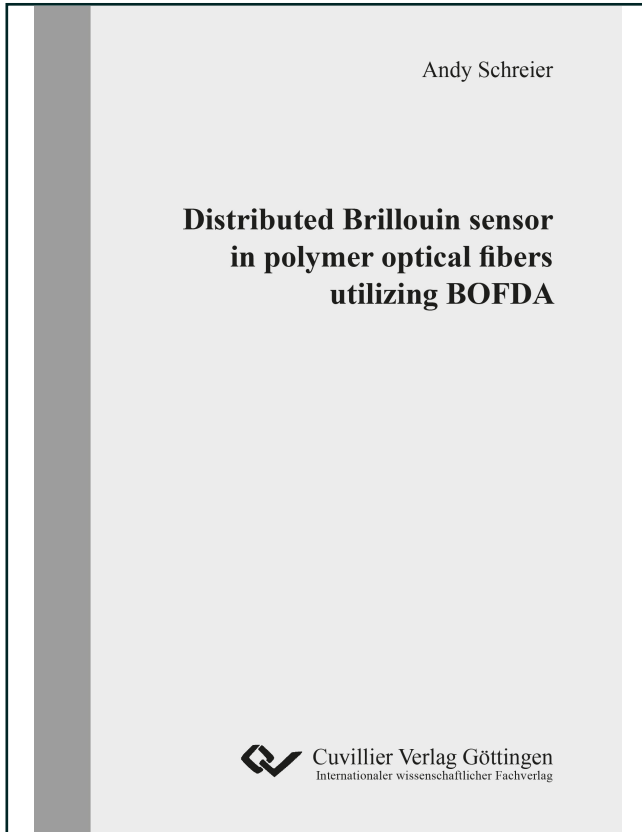

<https://cuvillier.de/de/shop/publications/8169>

Copyright:

Cuvillier Verlag, Inhaberin Annette Jentsch-Cuvillier, Nonnenstieg 8, 37075 Göttingen,  
Germany

Telefon: +49 (0)551 54724-0, E-Mail: [info@cuvillier.de](mailto:info@cuvillier.de), Website: <https://cuvillier.de>

---

## Bibliography

---

- [1] G. P. Agrawal, *Nonlinear Fiber Optics*. Academic press, 2007.
- [2] R. W. Boyd, *Nonlinear Optics*. Elsevier, 2003.
- [3] T. Schneider, *Nonlinear Optics in Telecommunications*. Springer Science & Business Media, 2013.
- [4] S. Chin, L. Thévenaz, J. Sancho, S. Sales, J. Capmany, P. Berger, J. Bourderionnet, and D. Dolfi, “Broadband true time delay for microwave signal processing, using slow light based on stimulated Brillouin scattering in optical fibers,” *Optics Express*, vol. 18, no. 21, pp. 22 599–22 613, 2010.
- [5] S. Preußler, N. Wenzel, R.-P. Braun, N. Owschimikow, C. Vogel, A. Deninger, A. Zadok, U. Woggon, and T. Schneider, “Generation of ultra-narrow, stable and tunable millimeter-and terahertz-waves with very low phase noise,” *Optics Express*, vol. 21, no. 20, pp. 23 950–23 962, 2013.
- [6] I. Carr and D. Hanna, “Performance of a Nd: YAG oscillator/amplifier with phase-conjugation via stimulated Brillouin scattering,” *Applied Physics B: Lasers and Optics*, vol. 36, no. 2, pp. 83–92, 1985.
- [7] I. S. Grudinin, A. B. Matsko, and L. Maleki, “Brillouin lasing with a CaF<sub>2</sub> whispering gallery mode resonator,” *Physical Review Letters*, vol. 102, no. 4, p. 043902, 2009.
- [8] H. H. Diamandi and A. Zadok, “Ultra-narrowband integrated Brillouin laser,” *Nature Photonics*, vol. 13, no. 1, p. 9, 2019.
- [9] A. Zadok, A. Eyal, and M. Tur, “Stimulated Brillouin scattering slow light in optical fibers,” *Applied Optics*, vol. 50, no. 25, pp. E38–E49, 2011.
- [10] D. Garcus, T. Gogolla, K. Krebber, and F. Schliep, “Brillouin optical-fiber frequency-domain analysis for distributed temperature and strain measurements,” *Journal of Lightwave Technology*, vol. 15, no. 4, pp. 654–662, 1997.
- [11] A. Motil, A. Bergman, and M. Tur, “State of the art of Brillouin fiber-optic distributed sensing,” *Optics & Laser Technology*, vol. 78, pp. 81–103, 2016.
- [12] A. Loayssa, J. Urricelqui, H. Iribas, and J. José, *Dynamic to Long-Range Measurements in Sensors for Diagnostics and Monitoring*. CRC Press, 2018.

- [13] T. Kapa, A. Schreier, and K. Krebber, "A 100 km BOFDA assisted by first-order bi-directional Raman amplification," *Sensors*, vol. 19, no. 7, p. 1527, 2019.
- [14] M. A. Soto, X. Angulo-Vinuesa, S. Martin-Lopez, S.-H. Chin, J. D. Ania-Castanon, P. Corredera, E. Rochat, M. Gonzalez-Herraez, and L. Thévenaz, "Extending the real remoteness of long-range Brillouin optical time-domain fiber analyzers," *Journal of Lightwave Technology*, vol. 32, no. 1, pp. 152–162, 2014.
- [15] R. Bernini, G. Persichetti, E. Catalano, L. Zeni, and A. Minardo, "Refractive index sensing by Brillouin scattering in side-polished optical fibers," *Optics Letters*, vol. 43, no. 10, pp. 2280–2283, 2018.
- [16] R. Cohen, Y. London, Y. Antman, and A. Zadok, "Brillouin optical correlation domain analysis with 4 millimeter resolution based on amplified spontaneous emission," *Optics Express*, vol. 22, no. 10, pp. 12 070–12 078, 2014.
- [17] A. Zarifi, B. Stiller, M. Merklein, and B. Eggleton, "High resolution Brillouin sensing of micro-scale structures," *Applied Sciences*, vol. 8, no. 12, p. 2572, 2018.
- [18] A. Minardo, R. Bernini, and L. Zeni, "Distributed temperature sensing in polymer optical fiber by BOFDA," *IEEE Photonics Technology Letters*, vol. 26, no. 4, pp. 387–390, 2014.
- [19] P. J. Thomas and J. O. Hellevang, "A fully distributed fibre optic sensor for relative humidity measurements," *Sensors and Actuators B: Chemical*, vol. 247, pp. 284–289, 2017.
- [20] P. Thomas and J. Hellevang, "A high response polyimide fiber optic sensor for distributed humidity measurements," *Sensors and Actuators B: Chemical*, vol. 270, pp. 417–423, 2018.
- [21] A. Schreier, A. Wosniok, S. Liehr, and K. Krebber, "Humidity-induced Brillouin frequency shift in perfluorinated polymer optical fibers," *Optics Express*, vol. 26, no. 17, pp. 22 307–22 314, 2018.
- [22] A. Schreier, S. Liehr, A. Wosniok, and K. Krebber, "Investigation on the influence of humidity on stimulated Brillouin backscattering in perfluorinated polymer optical fibers," *Sensors*, vol. 18, no. 11, 2018.
- [23] S. Liehr, M. Breithaupt, and K. Krebber, "Distributed humidity sensing in PMMA optical fibers at 500 nm and 650 nm wavelengths," *Sensors*, vol. 17, no. 4, p. 738, 2017.
- [24] P. Stajanca, L. Mihai, D. Sporea, D. Neguț, H. Sturm, M. Schukar, and K. Krebber, "Effects of gamma radiation on perfluorinated polymer optical fibers," *Optical Materials*, vol. 58, pp. 226–233, 2016.
- [25] P. Stajanca and K. Krebber, "Radiation-induced attenuation of perfluorinated polymer optical fibers for radiation monitoring," *Sensors*, vol. 17, no. 9, p. 1959, 2017.
- [26] S. Liehr, S. Münzenberger, and K. Krebber, "Wavelength-scanning coherent otdr for dynamic high strain resolution sensing," *Optics Express*, vol. 26, no. 8, pp. 10 573–10 588, 2018.

- [27] M.-T. Hussels, S. Chruscicki, A. Habib, and K. Krebber, “Distributed acoustic fibre optic sensors for condition monitoring of pipelines,” in *Sixth European Workshop on Optical Fibre Sensors*, vol. 9916. International Society for Optics and Photonics, 2016, p. 99162Y.
- [28] K. Hicke and K. Krebber, “Towards efficient real-time submarine power cable monitoring using distributed fibre optic acoustic sensors,” in *Optical Fiber Sensors Conference (OFS), 2017 25th*. IEEE, 2017, pp. 1–4.
- [29] P. Stajanca, S. Chruscicki, T. Homann, S. Seifert, D. Schmidt, and A. Habib, “Detection of leak-induced pipeline vibrations using fiber—optic distributed acoustic sensing,” *Sensors*, vol. 18, no. 9, p. 2841, 2018.
- [30] P. Rohwetter, R. Eisermann, and K. Krebber, “Distributed acoustic sensing: Towards partial discharge monitoring,” in *24th International Conference on Optical Fibre Sensors*, vol. 9634. International Society for Optics and Photonics, 2015, p. 96341C.
- [31] G. Bashan, H. H. Diamandi, Y. London, E. Preter, and A. Zadok, “Optomechanical time-domain reflectometry,” *Nature Communications*, vol. 9, no. 1, p. 2991, 2018.
- [32] T. M. Daley, B. M. Freifeld, J. Ajo-Franklin, S. Dou, R. Pevzner, V. Shulakova, S. Kashikar, D. E. Miller, J. Goetz, J. Henniges *et al.*, “Field testing of fiber-optic distributed acoustic sensing (DAS) for subsurface seismic monitoring,” *The Leading Edge*, vol. 32, no. 6, pp. 699–706, 2013.
- [33] Y. Antman, A. Clain, Y. London, and A. Zadok, “Optomechanical sensing of liquids outside standard fibers using forward stimulated Brillouin scattering,” *Optica*, vol. 3, no. 5, pp. 510–516, 2016.
- [34] S. Liehr, M. Wendt, and K. Krebber, “Distributed strain measurement in per-fluorinated polymer optical fibres using optical frequency domain reflectometry,” *Measurement Science and Technology*, vol. 21, no. 9, p. 094023, 2010.
- [35] Y. Mizuno and K. Nakamura, “Potential of Brillouin scattering in polymer optical fiber for strain insensitive high accuracy temperature sensing,” *Optics Letters*, vol. 35, no. 23, pp. 3985–3987, 2010.
- [36] J. Zubia and J. Arrue, “Plastic optical fibers: An introduction to their technological processes and applications,” *Optical Fiber Technology*, vol. 7, no. 2, pp. 101–140, 2001.
- [37] A. Tagaya, Y. Koike, T. Kinoshita, E. Nihei, T. Yamamoto, and K. Sasaki, “Polymer optical fiber amplifier,” *Applied Physics Letters*, vol. 63, no. 7, pp. 883–884, 1993.
- [38] S. O’Keeffe, A. F. Fernandez, C. Fitzpatrick, B. Brichard, and E. Lewis, “Real-time gamma dosimetry using PMMA optical fibres for applications in the sterilization industry,” *Measurement Science and Technology*, vol. 18, no. 10, p. 3171, 2007.
- [39] B. M. Quandt, L. J. Scherer, L. F. Boesel, M. Wolf, G.-L. Bona, and R. M. Rossi, “Body-monitoring and health supervision by means of optical fiber-based sensing systems in medical textiles,” *Advanced Healthcare Materials*, vol. 4, no. 3, pp. 330–355, 2015.

- [40] C. Leitão, V. Ribau, V. Afreixo, P. Antunes, P. André, J. L. Pinto, P. Boutouyrie, S. Laurent, and J. M. Bastos, “Clinical evaluation of an optical fiber-based probe for the assessment of central arterial pulse waves,” *Hypertension Research*, vol. 41, no. 11, p. 904, 2018.
- [41] A. G. Leal-Junior, C. R. Díaz, C. Leitão, M. J. Pontes, C. Marques, and A. Frizera, “Polymer optical fiber-based sensor for simultaneous measurement of breath and heart rate under dynamic movements,” *Optics & Laser Technology*, vol. 109, pp. 429–436, 2019.
- [42] G. Wandermur, D. Rodrigues, R. Allil, V. Queiroz, R. Peixoto, M. Werneck, and M. Miguel, “Plastic optical fiber-based biosensor platform for rapid cell detection,” *Biosensors and Bioelectronics*, vol. 54, pp. 661–666, 2014.
- [43] R. N. Lopes, D. M. Rodrigues, R. C. Allil, and M. M. Werneck, “Plastic optical fiber immunosensor for fast detection of sulfate-reducing bacteria,” *Measurement*, vol. 125, pp. 377–385, 2018.
- [44] R. C. Allil, A. Manchego, A. Allil, I. Rodrigues, A. Werneck, G. C. Diaz, F. T. Dino, Y. Reyes, and M. Werneck, “Solar tracker development based on a POF bundle and Fresnel lens applied to environment illumination and microalgae cultivation,” *Solar Energy*, vol. 174, pp. 648–659, 2018.
- [45] Y. Mizuno and K. Nakamura, “Experimental study of Brillouin scattering in perfluorinated polymer optical fiber at telecommunication wavelength,” *Applied Physics Letters*, vol. 97, no. 2, p. 1103, 2010.
- [46] Y. Mizuno, P. Lenke, K. Krebber, and K. Nakamura, “Characterization of Brillouin gain spectra in polymer optical fibers fabricated by different manufacturers at 1.32 and 1.55  $\mu\text{m}$ ,” *IEEE Photonics Technology Letters*, vol. 24, no. 17, pp. 1496–1498, 2012.
- [47] Y. Mizuno, M. Kishi, K. Hotate, T. Ishigure, and K. Nakamura, “Observation of stimulated Brillouin scattering in polymer optical fiber with pump–probe technique,” *Optics Letters*, vol. 36, no. 12, pp. 2378–2380, 2011.
- [48] Y. Mizuno, W. Zou, Z. He, and K. Hotate, “Proposal of Brillouin optical correlation-domain reflectometry (BOCDR),” *Optics Express*, vol. 16, no. 16, pp. 12 148–12 153, 2008.
- [49] Y. Mizuno, N. Hayashi, H. Fukuda, K. Y. Song, and K. Nakamura, “Ultrahigh-speed distributed Brillouin reflectometry,” *Light: Science & Applications*, vol. 5, no. 12, p. e16184, 2016.
- [50] Y. Mizuno, H. Lee, and K. Nakamura, “Recent advances in Brillouin optical correlation-domain reflectometry,” *Applied Sciences*, vol. 8, no. 10, p. 1845, 2018.
- [51] H. Lee, N. Hayashi, Y. Mizuno, and K. Nakamura, “Slope-assisted Brillouin optical correlation-domain reflectometry using polymer optical fibers with high propagation loss,” *Journal of Lightwave Technology*, vol. 35, no. 11, pp. 2306–2310, Jun 2017.
- [52] Y. Koike, *Fundamentals of Plastic Optical Fibers*. John Wiley & Sons, 2014.
- [53] L. Brillouin, “Diffusion de la lumière et des rayons X par un corps transparent homogène - Influence de l’agitation thermique,” *Annales de Physique*, vol. 9, no. 17, pp. 88–122, 1922.

- [54] E. Gross, "Change of wave-length of light due to elastic heat waves at scattering in liquids," *Nature*, vol. 126, no. 3171, p. 201, 1930.
- [55] R. Chiao, C. Townes, and B. Stoicheff, "Stimulated Brillouin scattering and coherent generation of intense hypersonic waves," *Physical Review Letters*, vol. 12, no. 21, p. 592, 1964.
- [56] P. Kaiser and H. Astle, "Low-loss single-material fibers made from pure fused silica," *Bell System Technical Journal*, vol. 53, no. 6, pp. 1021–1039, 1974.
- [57] S. E. Miller, E. A. Marcatili, and T. Li, "Research toward optical-fiber transmission systems," *Proceedings of the IEEE*, vol. 61, no. 12, pp. 1703–1704, 1973.
- [58] E. Ippen and R. Stolen, "Stimulated Brillouin scattering in optical fibers," *Applied Physics Letters*, vol. 21, no. 11, pp. 539–541, 1972.
- [59] R. G. Smith, "Optical power handling capacity of low loss optical fibers as determined by stimulated Raman and Brillouin scattering," *Applied Optics*, vol. 11, no. 11, pp. 2489–2494, 1972.
- [60] T. Sonehara and H. Tanaka, "Forced Brillouin spectroscopy using frequency-tunable continuous wave lasers," *Physical Review Letters*, vol. 75, no. 23, p. 4234, 1995.
- [61] D. Pinnow, S. Candau, J. LaMacchia, and T. Litovitz, "Brillouin scattering: viscoelastic measurements in liquids," *The Journal of the Acoustical Society of America*, vol. 43, no. 1, pp. 131–142, 1968.
- [62] G. Scarcelli and S. H. Yun, "Confocal Brillouin microscopy for three-dimensional mechanical imaging," *Nature Photonics*, vol. 2, no. 1, p. 39, 2008.
- [63] S. Speziale, H. Marquardt, and T. S. Duffy, "Brillouin scattering and its application in geosciences," *Reviews in Mineralogy and Geochemistry*, vol. 78, no. 1, pp. 543–603, 2014.
- [64] H. Ohno, H. Naruse, M. Kihara, and A. Shimada, "Industrial applications of the BOTDR optical fiber strain sensor," *Optical Fiber Technology*, vol. 7, no. 1, pp. 45–64, 2001.
- [65] A. Minardo, R. Bernini, R. Ruiz-Lombera, J. Mirapeix, J. M. Lopez-Higuera, and L. Zeni, "Proposal of Brillouin optical frequency domain reflectometry (BOFDR)," *Optics Express*, vol. 24, no. 26, pp. 29994–30001, 2016.
- [66] S. Preußler, *Bandwidth Reduction of Stimulated Brillouin Scattering and Applications in Optical Communication*. Cuvillier Verlag, 2016.
- [67] R. Engelbrecht, *Nichtlineare Faseroptik: Grundlagen und Anwendungsbeispiele*. Springer-Verlag, 2015.
- [68] M. Damzen, V. Vlad, A. Mocofanescu, and V. Babin, *Stimulated Brillouin Scattering: Fundamentals and Applications*. CRC press, 2003.
- [69] W. Gardner, "Appendix on nonlinearities for G. 650," *ITU Document COM*, pp. 15–273, 1996.
- [70] D. Cotter, "Observation of stimulated Brillouin scattering in low-loss silica fibre at 1.3  $\mu\text{m}$ ," *Electronics Letters*, vol. 18, no. 12, pp. 495–496, 1982.

- [71] P. Bayvel and P. Radmore, "Solutions of the SBS equations in single mode optical fibres and implications for fibre transmission systems," *Electronics Letters*, vol. 26, no. 7, pp. 434–436, 1990.
- [72] M. O. Van Deventer and A. J. Boot, "Polarization properties of stimulated Brillouin scattering in single-mode fibers," *Journal of Lightwave Technology*, vol. 12, no. 4, pp. 585–590, 1994.
- [73] L. Thevenaz, *Limitations Caused by Nonlinear Effects*. Cost 241 - Final Report, 1998.
- [74] N. Nöther, A. Wosniok, K. Krebber, and E. Thiele, "A distributed fiber optic sensor system for dike monitoring using brillouin frequency domain analysis," in *Proc. SPIE*, vol. 7003, 2008, pp. 700 303–1.
- [75] FF-GI-B075 – Graded-Index Plastic Optical Fiber. [Online]. Available: <https://store.fiberfin.com/media/custom/upload/File-1403209861.pdf>
- [76] Y. Koike and M. Asai, "The future of plastic optical fiber," *NPG Asia Materials*, vol. 1, no. 1, p. 22, 2009.
- [77] E. Nihei, T. Ishigure, N. Tanio, and Y. KOIKE, "Present prospect of graded-index plastic optical fiber in telecommunication," *IEICE Transactions on Electronics*, vol. 80, no. 1, pp. 117–122, 1997.
- [78] W. R. White, L. L. Blyler, R. Ratnagiri, and M. Park, "Manufacture of perfluorinated plastic optical fibers," in *Optical Fiber Communication Conference*. Optical Society of America, 2004, p. Th11.
- [79] Y. Koike and T. Ishigure, "High-bandwidth plastic optical fiber for fiber to the display," *Journal of Lightwave Technology*, vol. 24, no. 12, pp. 4541–4553, 2006.
- [80] C. Lethien, C. Loyez, J.-P. Vilcot, N. Rolland, and P. A. Rolland, "Exploit the bandwidth capacities of the perfluorinated graded index polymer optical fiber for multi-services distribution," *Polymers*, vol. 3, no. 3, pp. 1006–1028, 2011.
- [81] A. Doğan, B. Bek, N. Cevik, and A. Usanmaz, "The effect of preparation conditions of acrylic denture base materials on the level of residual monomer, mechanical properties and water absorption," *Journal of Dentistry*, vol. 23, no. 5, pp. 313–318, 1995.
- [82] Graded-index polymer optical fiber (GI-POF). [Online]. Available: <https://www.thorlabs.com/catalogPages/1100.pdf>
- [83] Corning® ClearCurve® multimode optical fiber - product information. [Online]. Available: [https://www.corning.com/media/worldwide/coc/documents/Fiber/PI1468\\_07-14.English.pdf](https://www.corning.com/media/worldwide/coc/documents/Fiber/PI1468_07-14.English.pdf)
- [84] T. Ishigure, Y. Koike, and J. W. Fleming, "Optimum index profile of the perfluorinated polymer-based GI polymer optical fiber and its dispersion properties," *Journal of Lightwave Technology*, vol. 18, no. 2, pp. 178–184, 2000.
- [85] P. J. Decker, A. Polley, J. H. Kim, and S. E. Ralph, "Statistical study of graded-index perfluorinated plastic optical fiber," *Journal of Lightwave Technology*, vol. 29, no. 3, pp. 305–315, 2010.

- [86] S. Kawakami and H. Tanji, "Evolution of power distribution in graded-index fibres," *Electronics Letters*, vol. 19, no. 3, pp. 100–102, 1983.
- [87] R. Shi, C. Koeppen, G. Jiang, J. Wang, and A. Garito, "Origin of high bandwidth performance of graded-index plastic optical fibers," *Applied Physics Letters*, vol. 71, no. 25, pp. 3625–3627, 1997.
- [88] A. Garito, J. Wang, and R. Gao, "Effects of random perturbations in plastic optical fibers," *Science*, vol. 281, no. 5379, pp. 962–967, 1998.
- [89] S. E. Golowich, W. White, W. A. Reed, and E. Knudsen, "Quantitative estimates of mode coupling and differential modal attenuation in perfluorinated graded-index plastic optical fiber," *Journal of Lightwave Technology*, vol. 21, no. 1, p. 111, 2003.
- [90] A. Polley and S. E. Ralph, "Mode coupling in plastic optical fiber enables 40-Gb/s performance," *IEEE Photonics Technology Letters*, vol. 19, no. 16, pp. 1254–1256, 2007.
- [91] W. White, M. Dueser, W. Reed, and T. Onishi, "Intermodal dispersion and mode coupling in perfluorinated graded-index plastic optical fiber," *IEEE Photonics Technology Letters*, vol. 11, no. 8, pp. 997–999, 1999.
- [92] P. Stajanca, O. Cetinkaya, M. Schukar, P. Mergo, D. J. Webb, and K. Kribber, "Molecular alignment relaxation in polymer optical fibers for sensing applications," *Optical Fiber Technology*, vol. 28, pp. 11–17, 2016.
- [93] A. G. Leal-Junior, A. Theodosiou, C. Marques, M. J. Pontes, K. Kalli, and A. Frizera, "Compensation method for temperature cross-sensitivity in transverse force applications with FBG sensors in POFs," *Journal of Lightwave Technology*, vol. 36, no. 17, pp. 3660–3665, Sep 2018.
- [94] S. Liehr, *Fibre Optic Sensing Techniques Based on Incoherent Optical Frequency Domain Reflectometry*. BAM-Dissertationsreihe, 2015.
- [95] H. Yang, S. J. Lee, E. Tangdiongga, C. Okonkwo, H. P. van den Boom, F. Breyer, S. Randel, and A. Koonen, "47.4 Gb/s transmission over 100 m graded-index plastic optical fiber based on rate-adaptive discrete multitone modulation," *Journal of Lightwave Technology*, vol. 28, no. 4, pp. 352–359, 2010.
- [96] A. Kobayakov, S. Kumar, D. Q. Chowdhury, A. B. Ruffin, M. Sauer, S. R. Bickham, and R. Mishra, "Design concept for optical fibers with enhanced SBS threshold," *Optics Express*, vol. 13, no. 14, pp. 5338–5346, 2005.
- [97] A. Wosniok, "Untersuchungen zur Unterscheidung der Einflussgrößen Temperatur und Dehnung bei Anwendung der verteilten Brillouin-Sensorik in der Bauwerksüberwachung," Ph.D. dissertation, Technische Universität Berlin, Fakultät II - Mathematik und Naturwissenschaften, 2013.
- [98] W.-W. Ke, X.-J. Wang, and X. Tang, "Stimulated Brillouin scattering model in multi-mode fiber lasers," *IEEE Journal of Selected Topics in Quantum Electronics*, vol. 20, no. 5, pp. 305–314, 2014.
- [99] B. Ward and M. Mermelstein, "Modeling of inter-modal Brillouin gain in higher-order-mode fibers," *Optics express*, vol. 18, no. 3, pp. 1952–1958, 2010.



- [100] A. Li, Q. Hu, and W. Shieh, “Characterization of stimulated Brillouin scattering in a circular-core two-mode fiber using optical time-domain analysis,” *Optics Express*, vol. 21, no. 26, pp. 31 894–31 906, 2013.
- [101] K. Y. Song and Y. H. Kim, “Characterization of stimulated Brillouin scattering in a few-mode fiber,” *Optics Letters*, vol. 38, no. 22, pp. 4841–4844, 2013.
- [102] K. Y. Song, Y. H. Kim, and B. Y. Kim, “Intermodal stimulated Brillouin scattering in two-mode fibers,” *Optics Letters*, vol. 38, no. 11, pp. 1805–1807, 2013.
- [103] V. I. Kovalev and R. G. Harrison, “Waveguide-induced inhomogeneous spectral broadening of stimulated Brillouin scattering in optical fiber,” *Optics Letters*, vol. 27, no. 22, pp. 2022–2024, 2002.
- [104] H. Eichler, A. Mocofanescu, T. Riesbeck, E. Risse, and D. Bedau, “Stimulated Brillouin scattering in multimode fibers for optical phase conjugation,” *Optics Communications*, vol. 208, no. 4-6, pp. 427–431, 2002.
- [105] A. Mocofanescu, L. Wang, R. Jain, K. Shaw, A. Gavrielides, P. Peterson, and M. Sharma, “SBS threshold for single mode and multimode GRIN fibers in an all fiber configuration,” *Optics Express*, vol. 13, no. 6, pp. 2019–2024, 2005.
- [106] G. A. Decker Jr, “Method of fabricating an optical attenuator by fusion splicing of optical fibers,” 1985, US Patent 4,557,556.
- [107] Y. Koyamada, S. Sato, S. Nakamura, H. Sotobayashi, and W. Chujo, “Simulating and designing Brillouin gain spectrum in single-mode fibers,” *Journal of Lightwave Technology*, vol. 22, no. 2, pp. 631–639, 2004.
- [108] A. Minardo, R. Bernini, and L. Zeni, “Experimental and numerical study on stimulated Brillouin scattering in a graded-index multimode fiber,” *Optics Express*, vol. 22, no. 14, pp. 17 480–17 489, 2014.
- [109] M. C. Hudson, “Calculation of the maximum optical coupling efficiency into multimode optical waveguides,” *Applied Optics*, vol. 13, no. 5, pp. 1029–1033, 1974.
- [110] Y. Koike and A. Inoue, “High-speed graded-index plastic optical fibers and their simple interconnects for 4K/8K video transmission,” *Journal of Lightwave Technology*, vol. 34, no. 6, pp. 1551–1555, 2016.
- [111] Y. Mizuno and K. Nakamura, “Core alignment of butt coupling between single-mode and multimode optical fibers by monitoring Brillouin scattering signal,” *Journal of Lightwave Technology*, vol. 29, no. 17, pp. 2616–2620, 2011.
- [112] O. Ziemann, J. Krauser, P. E. Zamzow, and W. Daum, *POF Handbook*, 2nd ed. Springer Berlin Heidelberg, 2008. ISBN 978-3-540-76628-5
- [113] M. Olivero, G. Perrone, and A. Vallan, “Near-field measurements and mode power distribution of multimode optical fibers,” *IEEE Transactions on Instrumentation and Measurement*, vol. 59, no. 5, pp. 1382–1388, 2010.
- [114] D. Marcuse, “Coupled mode theory of round optical fibers,” *Bell Labs Technical Journal*, vol. 52, no. 6, pp. 817–842, 1973.
- [115] D. Marcuse, “Gaussian approximation of the fundamental modes of graded-index fibers,” *JOSA*, vol. 68, no. 1, pp. 103–109, 1978.

- [116] A. W. Snyder and R. A. Sammut, "Fundamental (HE 11) modes of graded optical fibers," *Journal of the Optical Society of America A*, vol. 69, no. 12, pp. 1663–1671, 1979.
- [117] A. Ghatak and K. Thyagarajan, *An Introduction to Fiber Optics*. Cambridge university press, 1998.
- [118] T. P. H. Jeschke, *Untersuchung der Steckerverbindung zwischen polymeroptischen- und quartzglasbasierten Fasern*. Institut für Hochfrequenztechnik Photonik, Technische Universität Berlin, 05/2017.
- [119] A. Schreier, T. Jeschke, K. Petermann, A. Wosniok, and K. Krebber, "Analytical model for mode based insertion loss in ball-lensed coupling of graded-index silica and polymer fibres," *26th International Conference on Plastic Optical Fibres, POF 2017 - Proceedings*, 2017.
- [120] Corning® SMF-28® ultra optical fiber - product information. [Online]. Available: <https://www.corning.com/media/worldwide/coc/documents/Fiber/SMF-28%20Ultra.pdf>
- [121] D. Gloge and E. Marcatili, "Multimode theory of grade core fibers," *Bell Labs Technical Journal*, vol. 52, no. 9, pp. 1563–1578, 1973.
- [122] D. Marcuse, "Loss analysis of single mode fiber splices," *Bell Labs Technical Journal*, vol. 56, no. 5, pp. 703–718, 1977.
- [123] R. Abram, R. Allen, and R. Goodfellow, "The coupling of light-emitting diodes to optical fibers using sphere lenses," *Journal of Applied Physics*, vol. 46, no. 8, pp. 3468–3474, 1975.
- [124] J. C. Palais, "Fiber coupling using graded-index rod lenses," *Applied Optics*, vol. 19, no. 12, pp. 2011–2018, 1980.
- [125] R. Ulrich and S. Rashleigh, "Beam-to-fiber coupling with low standing wave ratio," *Applied Optics*, vol. 19, no. 14, pp. 2453–2456, 1980.
- [126] Y. Koike, H. Suzuki, H. Muto, A. Mitsui, N. Moriya, T. Torikai, and T. Yamauchi, "Optical collimator and optical connector using same," Mar. 3 2015, US Patent 8,967,880.
- [127] LaCroix Dynamic Material Selection Data Tool vJanuary 2015. [Online]. Available: <https://web.archive.org/web/20151011033820/http://www.lacroixoptical.com/sites/default/files/content/LaCroix%20Dynamic%20Material%20Selection%20Data%20Tool%20vJanuary%202015.xlsm>
- [128] A. Theodosiou, M. Komodromos, and K. Kalli, "Carbon cantilever beam health inspection using a polymer fiber Bragg grating array," *Journal of Lightwave Technology*, vol. 36, no. 4, pp. 986–992, 2018.
- [129] Y. Mizuno, N. Hayashi, and K. Nakamura, "Simple coupling method for enhancing Brillouin scattering signal in polymer optical fibres," *Electronics Letters*, vol. 48, no. 20, pp. 1300–1301, 2012.
- [130] TIA Standard FOCIS 4, *Fiber Optic Connector Intermateability Standard- Type FC and FC-APC, TIA-604-4-B*. Telecommunications Industry Association, 09-01-2004.

- [131] M. Barnoski and S. Jensen, "Fiber waveguides: a novel technique for investigating attenuation characteristics," *Applied Optics*, vol. 15, no. 9, pp. 2112–2115, 1976.
- [132] T. Horiguchi and M. Tateda, "BOTDA - Non destructive measurement of single-mode optical fiber attenuation characteristics using Brillouin interaction: Theory," *Journal of Lightwave Technology*, vol. 7, no. 8, pp. 1170–1176, 1989.
- [133] V. Lecoche, D. J. Webb, C. N. Pannell, and D. A. Jackson, "Transient response in high-resolution Brillouin-based distributed sensing using probe pulses shorter than the acoustic relaxation time," *Optics Letters*, vol. 25, no. 3, pp. 156–158, 2000.
- [134] A. Zadok, E. Zilka, A. Eyal, L. Thévenaz, and M. Tur, "Vector analysis of stimulated Brillouin scattering amplification in standard single-mode fibers," *Optics Express*, vol. 16, no. 26, pp. 21 692–21 707, 2008.
- [135] O. Shlomovits, T. Langer, and M. Tur, "The effect of source phase noise on stimulated Brillouin amplification," *Journal of Lightwave Technology*, vol. 33, no. 12, pp. 2639–2645, 2015.
- [136] A. Minardo, R. Bernini, and L. Zeni, "Analysis of SNR penalty in Brillouin optical time-domain analysis sensors induced by laser source phase noise," *Journal of Optics*, vol. 18, no. 2, p. 025601, 2015.
- [137] M. Alem, M. A. Soto, and L. Thévenaz, "Analytical model and experimental verification of the critical power for modulation instability in optical fibers," *Optics Express*, vol. 23, no. 23, pp. 29 514–29 532, 2015.
- [138] R. Ruiz-Lombera, J. Urricelqui, M. Sagues, J. Mirapeix, J. M. Lopez-Higuera, and A. Loayssa, "Overcoming nonlocal effects and Brillouin threshold limitations in Brillouin optical time-domain sensors," *IEEE Photonics Journal*, vol. 7, no. 6, pp. 1–9, 2015.
- [139] L. Thévenaz, S. F. Mafang, and J. Lin, "Effect of pulse depletion in a Brillouin optical time-domain analysis system," *Optics Express*, vol. 21, no. 12, pp. 14 017–14 035, 2013.
- [140] F. Gyger, E. Rochat, S. Chin, M. Niklès, and L. Thévenaz, "Extending the sensing range of Brillouin optical time-domain analysis up to 325 km combining four optical repeaters," in *23rd International Conference on Optical Fibre Sensors*, vol. 9157. International Society for Optics and Photonics, 2014, p. 91576Q.
- [141] M. Taki, Y. Muanenda, C. Oton, T. Nannipieri, A. Signorini, and F. Di Pasquale, "Cyclic pulse coding for fast BOTDA fiber sensors," *Optics Letters*, vol. 38, no. 15, pp. 2877–2880, 2013.
- [142] A. Dominguez-Lopez, A. Lopez-Gil, S. Martin-Lopez, and M. Gonzalez-Herraez, "Strong cancellation of RIN transfer in a Raman-assisted BOTDA using balanced detection," *IEEE Photonics Technology Letters*, vol. 26, no. 18, pp. 1817–1820, 2014.
- [143] A. Zornoza, M. Sagues, and A. Loayssa, "Self-heterodyne detection for SNR improvement and distributed phase-shift measurements in BOTDA," *Journal of Lightwave Technology*, vol. 30, no. 8, pp. 1066–1072, 2011.
- [144] A. W. Brown, B. G. Colpitts, and K. Brown, "Dark-pulse Brillouin optical time-domain sensor with 20-mm spatial resolution," *Journal of Lightwave Technology*, vol. 25, no. 1, pp. 381–386, 2007.

- [145] T. Sperber, A. Eyal, M. Tur, and L. Thévenaz, “High spatial resolution distributed sensing in optical fibers by Brillouin gain-profile tracing,” *Optics Express*, vol. 18, no. 8, pp. 8671–8679, 2010.
- [146] W. Li, X. Bao, Y. Li, and L. Chen, “Differential pulse-width pair BOTDA for high spatial resolution sensing,” *Optics Express*, vol. 16, no. 26, pp. 21 616–21 625, 2008.
- [147] K. Kishida and C. Li, “Pulse pre-pump-BOTDA technology for new generation of distributed strain measuring system,” *Structural health monitoring and intelligent infrastructure*, vol. 1, pp. 471–477, 2005.
- [148] X. Bao, A. Brown, M. DeMerchant, and J. Smith, “Characterization of the Brillouin-loss spectrum of single-mode fibers by use of very short pulses,” *Optics Letters*, vol. 24, no. 8, pp. 510–512, 1999.
- [149] M. S. D. B. Zan, T. Tsumuraya, and T. Horiguchi, “The use of Walsh code in modulating the pump light of high spatial resolution phase-shift-pulse Brillouin optical time domain analysis with non-return-to-zero pulses,” *Measurement Science and Technology*, vol. 24, no. 9, p. 094025, 2013.
- [150] R. Bernini, A. Minardo, and L. Zeni, “Dynamic strain measurement in optical fibers by stimulated Brillouin scattering,” *Optics Letters*, vol. 34, no. 17, pp. 2613–2615, 2009.
- [151] A. Voskoboinik, O. F. Yilmaz, A. W. Willner, and M. Tur, “Sweep-free distributed Brillouin time-domain analyzer (SF-BOTDA),” *Optics Express*, vol. 19, no. 26, pp. B842–B847, Dec 2011.
- [152] Q. Bai, Q. Wang, D. Wang, Y. Wang, Y. Gao, H. Zhang, M. Zhang, and B. Jin, “Recent advances in Brillouin optical time domain reflectometry,” *Sensors*, vol. 19, no. 8, p. 1862, 2019.
- [153] Y. Koyamada, Y. Sakairi, N. Takeuchi, and S. Adachi, “Novel technique to improve spatial resolution in Brillouin optical time-domain reflectometry,” *IEEE Photonics Technology Letters*, vol. 19, no. 23, pp. 1910–1912, 2007.
- [154] K. Nishiguchi, C.-H. Li, A. Guzik, and K. Kishida, “Synthetic spectrum approach for Brillouin optical time-domain reflectometry,” *Sensors*, vol. 14, no. 3, pp. 4731–4754, 2014.
- [155] R. Shibata, H. Kasahara, L. P. Elias, and T. Horiguchi, “Improving performance of phase shift pulse BOTDR,” *IEICE Electronics Express*, pp. 14–20 170 267, 2017.
- [156] M. S. D. Zan, Y. Masui, and T. Horiguchi, “Differential cross spectrum technique for improving the spatial resolution of BOTDR sensor,” in *2018 IEEE 7th International Conference on Photonics (ICP)*. IEEE, 2018, pp. 1–3.
- [157] Y. Peled, A. Motil, L. Yaron, and M. Tur, “Slope-assisted fast distributed sensing in optical fibers with arbitrary Brillouin profile,” *Optics Express*, vol. 19, no. 21, pp. 19 845–19 854, 2011.
- [158] D. Maraval, R. Gabet, Y. Jaouën, and V. Lamour, “Slope-assisted BOTDR for pipeline vibration measurements,” in *2017 25th Optical Fiber Sensors Conference (OFS)*. IEEE, 2017, pp. 1–4.

- [159] A. Motil, O. Danon, Y. Peled, and M. Tur, “Pump-power-independent double slope-assisted distributed and fast Brillouin fiber-optic sensor,” *IEEE Photonics Technology Letters*, vol. 26, no. 8, pp. 797–800, 2014.
- [160] D. Zhou, Y. Dong, B. Wang, T. Jiang, D. Ba, P. Xu, H. Zhang, Z. Lu, and H. Li, “Slope-assisted BOTDA based on vector SBS and frequency-agile technique for wide-strain-range dynamic measurements,” *Optics Express*, vol. 25, no. 3, pp. 1889–1902, 2017.
- [161] K.-Y. Song, Z. He, and K. Hotate, “Distributed strain measurement with millimeter-order spatial resolution based on Brillouin optical correlation domain analysis and beat lock-in detection scheme,” in *Optical Fiber Sensors*. Optical Society of America, 2006, p. ThC2.
- [162] K. Hotate and T. Hasegawa, “Measurement of Brillouin gain spectrum distribution along an optical fiber using a correlation-based technique—proposal, experiment and simulation,” *IEICE Transactions on Electronics*, vol. 83, no. 3, pp. 405–412, 2000.
- [163] K. Hotate, “Fiber distributed Brillouin sensing with optical correlation domain techniques,” *Optical Fiber Technology*, vol. 19, no. 6, pp. 700–719, 2013.
- [164] L. Thévenaz, *Advanced Fiber Optics*. EPFL Press, 2011.
- [165] K. Hotate, H. Arai, and K. Y. Song, “Range-enlargement of simplified Brillouin optical correlation domain analysis based on a temporal gating scheme,” *SICE Journal of Control, Measurement, and System Integration*, vol. 1, no. 4, pp. 271–274, 2008.
- [166] K. Y. Song, M. Kishi, Z. He, and K. Hotate, “High-repetition-rate distributed Brillouin sensor based on optical correlation-domain analysis with differential frequency modulation,” *Optics Letters*, vol. 36, no. 11, pp. 2062–2064, 2011.
- [167] C. Zhang, M. Kishi, and K. Hotate, “5,000 points/s high-speed random accessibility for dynamic strain measurement at arbitrary multiple points along a fiber by Brillouin optical correlation domain analysis,” *Applied Physics Express*, vol. 8, no. 4, p. 042501, 2015.
- [168] J. H. Jeong, K. Lee, K. Y. Song, J.-M. Jeong, and S. B. Lee, “Differential measurement scheme for Brillouin optical correlation domain analysis,” *Optics Express*, vol. 20, no. 24, pp. 27 094–27 101, 2012.
- [169] Y. Antman, N. Primerov, J. Sancho, L. Thévenaz, and A. Zadok, “Localized and stationary dynamic gratings via stimulated Brillouin scattering with phase modulated pumps,” *Optics Express*, vol. 20, no. 7, pp. 7807–7821, 2012.
- [170] Y. Antman, L. Yaron, T. Langer, M. Tur, N. Levanon, and A. Zadok, “Experimental demonstration of localized Brillouin gratings with low off-peak reflectivity established by perfect Golomb codes,” *Optics Letters*, vol. 38, no. 22, pp. 4701–4704, 2013.
- [171] S. Manotham, M. Kishi, Z. He, and K. Hotate, “1-cm spatial resolution with large dynamic range in strain distributed sensing by Brillouin optical correlation domain reflectometry based on intensity modulation,” in *Third Asia Pacific Optical Sensors Conference*, vol. 8351. International Society for Optics and Photonics, 2012, p. 835136.

- [172] B. Wang, X. Fan, Y. Fu, and Z. He, “Distributed dynamic strain measurement based on dual-slope-assisted Brillouin optical correlation domain analysis,” *Journal of Lightwave Technology*, 2019.
- [173] K.-Y. Song and K. Hotate, “Brillouin optical correlation domain analysis in linear configuration,” *IEEE Photonics Technology Letters*, vol. 20, no. 24, pp. 2150–2152, 2008.
- [174] Y. Mizuno, Z. He, and K. Hotate, “Measurement range enlargement in Brillouin optical correlation-domain reflectometry based on temporal gating scheme,” *Optics Express*, vol. 17, no. 11, pp. 9040–9046, 2009.
- [175] H. Lee, N. Hayashi, Y. Mizuno, and K. Nakamura, “Slope-assisted Brillouin optical correlation-domain reflectometry: proof of concept,” *IEEE Photonics Journal*, vol. 8, no. 3, pp. 1–7, 2016.
- [176] H. Lee, Y. Mizuno, and K. Nakamura, “Measurement sensitivity dependencies on incident power and spatial resolution in slope-assisted Brillouin optical correlation-domain reflectometry,” *Sensors and Actuators A: Physical*, vol. 268, pp. 68–71, 2017.
- [177] H. Lee, K. Noda, Y. Mizuno, and K. Nakamura, “Trade-off relation between strain dynamic range and spatial resolution in slope-assisted Brillouin optical correlation-domain reflectometry,” *Measurement Science and Technology*, vol. 30, no. 7, p. 075204, 2019.
- [178] H. Lee, Y. Mizuno, and K. Nakamura, “Enhanced stability and sensitivity of slope-assisted Brillouin optical correlation-domain reflectometry using polarization-maintaining fibers,” *OSA Continuum*, vol. 2, no. 3, pp. 874–880, 2019.
- [179] D. Garus, T. Gogolla, K. Krebber, and F. Schliep, “Distributed sensing technique based on Brillouin optical-fiber frequency-domain analysis,” *Optics Letters*, vol. 21, no. 17, pp. 1402–1404, 1996. doi: dx.doi.org/10.1364/OL.21.001402
- [180] A. Wosniok, “Distributed Brillouin Sensing: Frequency-Domain Techniques,” *Handbook of Optical Fibers*, pp. 1–25, 2017.
- [181] D. Gottlieb and C.-W. Shu, “On the Gibbs phenomenon and its resolution,” *SIAM Review*, vol. 39, no. 4, pp. 644–668, 1997.
- [182] R. Bernini, A. Minardo, and L. Zeni, “Distributed sensing at centimeter-scale spatial resolution by BOFDA: Measurements and signal processing,” *IEEE Photonics Journal*, vol. 4, no. 1, pp. 48–56, 2011.
- [183] T. Gogolla, *Theoretische Untersuchung der Brillouin-Wechselwirkung in Lichtleitfasern zur kontinuierlich verteilten Temperatur-und Dehnungsmessung auf Basis der Frequenzbereichsanalyse*. Shaker, 2000.
- [184] L. Zeni, E. Catalano, A. Coscetta, and A. Minardo, “High-pass filtering for accurate reconstruction of the Brillouin frequency shift profile from Brillouin optical frequency domain analysis data,” *IEEE Sensors Journal*, vol. 18, no. 1, pp. 185–192, 2017.
- [185] T. Kapa, A. Schreier, and K. Krebber, “63 km BOFDA for temperature and strain monitoring,” *Sensors*, vol. 18, no. 5, p. 1600, 2018.

- [186] K. George, C.-I. H. Chen, and J. B. Tsui, "Extension of two-signal spurious-free dynamic range of wideband digital receivers using Kaiser window and compensation method," *IEEE Transactions on Microwave Theory and Techniques*, vol. 55, no. 4, pp. 788–794, 2007.
- [187] A. Minardo, A. Coscetta, E. Catalano, R. Bernini, and L. Zeni, "High spatial resolution physical and chemical sensing based on BOFDA," in *Optical Sensors 2019*, vol. 11028. International Society for Optics and Photonics, 2019, p. 110281B.
- [188] A. Wosniok, Y. Mizuno, K. Kriebber, and K. Nakamura, "L-BOFDA: a new sensor technique for distributed Brillouin sensing," in *Fifth European Workshop on Optical Fibre Sensors*, vol. 8794. International Society for Optics and Photonics, 2013, p. 879431.
- [189] R. Ruiz-Lombera, A. Minardo, R. Bernini, J. Mirapeix, J. M. Lopez-Higuera, and L. Zeni, "Experimental demonstration of a Brillouin optical frequency-domain reflectometry (BOFDR) sensor," in *2017 25th Optical Fiber Sensors Conference (OFS)*. IEEE, 2017, pp. 1–4.
- [190] A. Y. Mohamed and N. Nöther, "Novel realization of Brillouin optical frequency domain reflectometry (BOFDR) with digital envelope detection," in *Optical Fiber Sensors*. Optical Society of America, 2018, p. TuE22.
- [191] N. Hayashi, Y. Mizuno, D. Koyama, and K. Nakamura, "Measurement of acoustic velocity in poly (methyl methacrylate)-based polymer optical fiber for Brillouin frequency shift estimation," *Applied Physics Express*, vol. 4, no. 10, p. 102501, 2011.
- [192] N. Hayashi, Y. Mizuno, D. Koyama, and K. Nakamura, "Dependence of Brillouin frequency shift on temperature and strain in poly (methyl methacrylate)-based polymer optical fibers estimated by acoustic velocity measurement," *Applied Physics Express*, vol. 5, no. 3, p. 032502, 2012.
- [193] K. Minakawa, K. Koike, N. Hayashi, Y. Koike, Y. Mizuno, and K. Nakamura, "Dependence of Brillouin frequency shift on water absorption ratio in polymer optical fibers," *Journal of Applied Physics*, vol. 119, no. 22, p. 223102, 2016.
- [194] K. Minakawa, N. Hayashi, Y. Mizuno, and K. Nakamura, "Potential applicability of Brillouin scattering in partially chlorinated polymer optical fibers to high-precision temperature sensing," *Applied Physics Express*, vol. 6, no. 5, p. 052501, 2013.
- [195] Y. Mizuno, T. Ishigure, and K. Nakamura, "Brillouin gain spectrum characterization in perfluorinated graded index polymer optical fiber with 62.5  $\mu\text{m}$  core diameter," *IEEE Photonics Technology Letters*, vol. 23, no. 24, pp. 1863–1865, 2011.
- [196] K. Minakawa, N. Hayashi, Y. Shinohara, M. Tahara, H. Hosoda, Y. Mizuno, and K. Nakamura, "Wide-range temperature dependences of Brillouin scattering properties in polymer optical fiber," *Japanese Journal of Applied Physics*, vol. 53, no. 4, p. 042502, 2014.
- [197] N. Hayashi, K. Minakawa, Y. Mizuno, and K. Nakamura, "Brillouin frequency shift hopping in polymer optical fiber," *Applied Physics Letters*, vol. 105, no. 9, p. 091113, 2014.

- [198] Y. Mizuno, N. Matsutani, N. Hayashi, H. Lee, M. Tahara, H. Hosoda, and K. Nakamura, “Brillouin characterization of slimmed polymer optical fibers for strain sensing with extremely wide dynamic range,” *Optics Express*, vol. 26, no. 21, pp. 28 030–28 037, 2018.
- [199] K. Minakawa, Y. Mizuno, and K. Nakamura, “Cross effect of strain and temperature on Brillouin frequency shift in polymer optical fibers,” *Journal of Lightwave Technology*, vol. 35, no. 12, pp. 2481–2486, Jun 2017.
- [200] Y. Dong, P. Xu, H. Zhang, Z. Lu, L. Chen, and X. Bao, “Characterization of evolution of mode coupling in a graded index polymer optical fiber by using Brillouin optical time domain analysis,” *Optics Express*, vol. 22, no. 22, pp. 26 510–26 516, 2014.
- [201] Y. Mizuno, N. Hayashi, and K. Nakamura, “Brillouin scattering signal in polymer optical fiber enhanced by exploiting pulsed pump with multimode-fiber-assisted coupling technique,” *Optics Letters*, vol. 38, no. 9, pp. 1467–1469, 2013.
- [202] Y. Mizuno, N. Hayashi, H. Tanaka, K. Nakamura, and S.-i. Todoroki, “Propagation mechanism of polymer optical fiber fuse,” *Scientific Reports*, vol. 4, p. 4800, 2014.
- [203] T. Kurashima, T. Horiguchi, and M. Tateda, “Thermal effects on the Brillouin frequency shift in jacketed optical silica fibers,” *Applied optics*, vol. 29, no. 15, pp. 2219–2222, 1990.
- [204] T. Horiguchi, T. Kurashima, and M. Tateda, “Tensile strain dependence of Brillouin frequency shift in silica optical fibers,” *IEEE Photonics Technology Letters*, vol. 1, no. 5, pp. 107–108, 1989.
- [205] W. Zou, Z. He, M. Kishi, and K. Hotate, “Stimulated Brillouin scattering and its dependences on temperature and strain in a high-delta optical fiber with F-doped depressed inner-cladding,” in *Optical Fiber Sensors*. Optical Society of America, 2006, p. ThE38.
- [206] W. Zou, Z. He, and K. Hotate, “Investigation of strain and temperature dependences of Brillouin frequency shifts in GeO<sub>2</sub>-doped optical fibers,” *Journal of Lightwave Technology*, vol. 26, no. 13, pp. 1854–1861, 2008.
- [207] A. Wosniok and A. Schreier, “Toward investigation of Brillouin scattering in multimode polymer and silica optical fibers,” in *SPIE Optics+ Optoelectronics*. International Society for Optics and Photonics, 2017, pp. 102 320M–102 320M.
- [208] K. Krebber, “Ortsauflösende Lichtleitfaser-Sensorik für Temperatur und Dehnung unter Nutzung der stimulierten Brillouin-Streuung basierend auf der Frequenzbereichsanalyse,” Ph.D. dissertation, Ruhr-Universität Bochum, Fakultät für Elektrotechnik und Informationstechnik, 2001.
- [209] K. E. Carroll, C. Zhang, D. J. Webb, K. Kalli, A. Argyros, and M. C. Large, “Thermal response of Bragg gratings in PMMA microstructured optical fibers,” *Optics Express*, vol. 15, no. 14, pp. 8844–8850, 2007.
- [210] M. A. Soto and L. Thévenaz, “Modeling and evaluating the performance of Brillouin distributed optical fiber sensors,” *Optics Express*, vol. 21, no. 25, pp. 31 347–31 366, 2013.



- [211] T. Strutz, *Data Fitting and Uncertainty: A Practical Introduction to Weighted Least Squares and Beyond*. Vieweg and Teubner, 2010.
- [212] K. Levenberg, “A method for the solution of certain non-linear problems in least squares,” *Quarterly of Applied Mathematics*, vol. 2, no. 2, pp. 164–168, 1944.
- [213] D. W. Marquardt, “An algorithm for least-squares estimation of nonlinear parameters,” *Journal of the Society for Industrial and Applied Mathematics*, vol. 11, no. 2, pp. 431–441, 1963.
- [214] A. W. Brown, B. G. Colpitts, and K. Brown, “Distributed sensor based on dark-pulse Brillouin scattering,” *Photonics Technology Letters, IEEE*, vol. 17, no. 7, pp. 1501–1503, 2005.
- [215] H. Liang, W. Li, N. Linze, L. Chen, and X. Bao, “High-resolution DPP-BOTDA over 50 km LEAF using return-to-zero coded pulses,” *Opt. Lett.*, vol. 35, no. 10, pp. 1503–1505, May 2010.
- [216] Passive optical components – optical circulator. [Online]. Available: [www.fiberopticshare.com/passive-optical-components-optical-circulator.html](http://www.fiberopticshare.com/passive-optical-components-optical-circulator.html)
- [217] D. Marcuse, *Theory of Dielectric Optical Waveguides*. Elsevier, 2013.
- [218] M. C. Simon, “Ray tracing formulas for monoaxial optical components,” *Applied optics*, vol. 22, no. 2, pp. 354–360, 1983.
- [219] M. Avendaño-Alejo, “Analysis of the refraction of the extraordinary ray in a plane-parallel uniaxial plate with an arbitrary orientation of the optical axis.” *Optics express*, vol. 13, no. 7, pp. 2549–2555, 2005.
- [220] O. A. Alduchov and R. E. Eskridge, “Improved magnus form approximation of saturation vapor pressure,” *Journal of Applied Meteorology*, vol. 35, no. 4, pp. 601–609, 1996.
- [221] J. G. Speight *et al.*, *Lange’s Handbook of Chemistry*. McGraw Hill New York, 2005, vol. 1.
- [222] M. R. Moldover, J. M. Trusler, T. Edwards, J. B. Mehl, and R. S. Davis, “Measurement of the universal gas constant R using a spherical acoustic resonator,” *Physical Review Letters*, vol. 60, no. 4, p. 249, 1988.
- [223] M. Nikles, L. Thevenaz, and P. A. Robert, “Brillouin gain spectrum characterization in single mode optical fibers,” *Journal of Lightwave Technology*, vol. 15, no. 10, pp. 1842–1851, 1997.
- [224] A. Shenoy, *Thermoplastic Melt Rheology and Processing*. CRC Press, 1996.
- [225] L. Rothman, I. Gordon, A. Barbe, D. Benner, P. Bernath, M. Birk, V. Boudon, L. Brown, A. Campargue, J.-P. Champion, K. Chance, L. Coudert, V. Dana, V. Devi, S. Fally, J.-M. Flaud, R. Gamache, A. Goldman, D. Jacquemart, I. Kleiner, N. Lacome, W. Lafferty, J.-Y. Mandin, S. Massie, S. Mikhailenko, C. Miller, N. Moazzen-Ahmadi, O. Naumenko, A. Nikitin, J. Orphal, V. Perevalov, A. Perrin, A. Predoi-Cross, C. Rinsland, M. Rotger, M. Šimečková, M. Smith, K. Sung, S. Tashkun, J. Tennyson, R. Toth, A. Vandaele, and J. V. Auwera, “The HITRAN 2008 molecular spectroscopic database,” *Journal of Quantitative Spectroscopy and Radiative Transfer*, vol. 110, no. 9, pp. 533 – 572, 2009, HITRAN.

- [226] D. O'Hagan, "Understanding organofluorine chemistry. An introduction to the C–F bond," *Chemical Society Reviews*, vol. 37, pp. 308–319, 2008.
- [227] S. Spießberger, M. Schiemangk, A. Wicht, H. Wenzel, G. Erbert, and G. Tränkle, "DBR laser diodes emitting near 1064 nm with a narrow intrinsic linewidth of 2 kHz," *Applied Physics B*, vol. 104, no. 4, p. 813, Jul 2011.
- [228] A. Klehr, B. Sumpf, K.-H. Hasler, J. Fricke, A. Liero, and G. Erbert, "High-power pulse generation in GHz range with 1064 nm DBR tapered laser," *IEEE Photonics Technology Letters*, vol. 22, no. 11, pp. 832–834, 2010.
- [229] P. Atkins and J. de Paula, *Atkins' Physical Chemistry*. Oxford University Press, 2006.
- [230] O. Reshef, K. Shtyrkova, M. G. Moebius, S. Griesse-Nascimento, S. Spector, C. C. Evans, E. Ippen, and E. Mazur, "Polycrystalline anatase titanium dioxide microring resonators with negative thermo-optic coefficient," *JOSA B*, vol. 32, no. 11, pp. 2288–2293, 2015.
- [231] Y. J. Weitsman, *Fluid Effects in Polymers and Polymeric Composites*. Springer Science & Business Media, 2011.
- [232] H. Bair, G. Johnson, and R. Merriweather, "Water sorption of polycarbonate and its effect on the polymer's dielectric behavior," *Journal of Applied Physics*, vol. 49, no. 10, pp. 4976–4984, 1978.
- [233] Y. Luo, B. Yan, Q. Zhang, G.-D. Peng, J. Wen, and J. Zhang, "Fabrication of polymer optical fibre (POF) gratings," *Sensors*, vol. 17, no. 3, p. 511, 2017.
- [234] W. Yuan, A. Stefani, M. Bache, T. Jacobsen, B. Rose, N. Herholdt-Rasmussen, F. K. Nielsen, S. Andresen, O. B. Sørensen, K. S. Hansen, and O. Bang, "Improved thermal and strain performance of annealed polymer optical fiber Bragg gratings," *Optics Communications*, vol. 284, no. 1, pp. 176–182, 2011.
- [235] J. Urricelqui, M. A. Soto, and L. Thévenaz, "Sources of noise in Brillouin optical time-domain analyzers," in *International Conference on Optical Fibre Sensors (OFS24)*. International Society for Optics and Photonics, 2015. doi: dx.doi.org/10.1117/12.2195298 pp. 963 434–963 434.
- [236] T. Horiguchi, K. Shimizu, T. Kurashima, M. Tateda, and Y. Koyamada, "Development of a distributed sensing technique using Brillouin scattering," *Journal of Lightwave Technology*, vol. 13, no. 7, pp. 1296–1302, 1995.
- [237] P. Kronenberg, P. K. Rastogi, P. Giaccari, and H. G. Limberger, "Relative humidity sensor with optical fiber Bragg gratings," *Optics Letters*, vol. 27, no. 16, pp. 1385–1387, 2002.
- [238] C. Galindez, F. J. Madruga, and J. M. Lopez-Higuera, "Influence of humidity on the measurement of Brillouin frequency shift," *IEEE Photonics Technology Letters*, vol. 20, no. 23, pp. 1959–1961, 2008.
- [239] International Electrotechnical Commission, *Temperature measurement - Distributed sensing (IEC 6175722: 2016)*. International Electrotechnical Commission, 2016.

- [240] Y. Yu, L. Luo, B. Li, K. Soga, and J. Yan, “Frequency resolution quantification of Brillouin-distributed optical fiber sensors,” *IEEE Photonics Technology Letters*, vol. 28, no. 21, pp. 2367–2370, 2016.
- [241] H. Zheng, Z. Fang, Z. Wang, B. Lu, Y. Cao, Q. Ye, R. Qu, and H. Cai, “Brillouin frequency shift of fiber distributed sensors extracted from noisy signals by quadratic fitting,” *Sensors*, vol. 18, no. 2, p. 409, 2018.
- [242] A. Azad, L. Wang, N. Guo, C. Lu, and H. Tam, “Temperature sensing in BOTDA system by using artificial neural network,” *Electronics Letters*, vol. 51, no. 20, pp. 1578–1580, 2015.
- [243] A. K. Azad, L. Wang, N. Guo, H.-Y. Tam, and C. Lu, “Signal processing using artificial neural network for BOTDA sensor system,” *Optics Express*, vol. 24, no. 6, pp. 6769–6782, 2016.
- [244] R. Ruiz-Lombera, A. Fuentes, L. Rodríguez-Cobo, J. M. López-Higuera, and J. Mirapeix, “Simultaneous temperature and strain discrimination in a conventional BOTDA via artificial neural networks,” *Journal of Lightwave Technology*, vol. 36, no. 11, pp. 2114–2121, 2018.
- [245] H. Lee, Y. Mizuno, and K. Nakamura, “Enhanced stability and sensitivity of slope-assisted Brillouin optical correlation-domain reflectometry using polarization-maintaining fibers,” *OSA Continuum*, vol. 2, no. 3, pp. 874–880, 2019.
- [246] R. Ruiz-Lombera, I. Laarossi, L. Rodríguez-Cobo, M. Á. Quintela, J. M. López-Higuera, and J. Mirapeix, “Distributed high-temperature optical fiber sensor based on a Brillouin optical time domain analyzer and multimode gold-coated fiber,” *IEEE Sensors Journal*, vol. 17, no. 8, pp. 2393–2397, 2017.
- [247] Y. Dong, L. Chen, and X. Bao, “Time-division multiplexing-based BOTDA over 100km sensing length,” *Optics Letters*, vol. 36, no. 2, pp. 277–279, 2011.
- [248] H. Ohno, H. Naruse, N. Yasue, Y. Miyajima, H. Uchiyama, Y. Sakairi, and Z. X. Li, “Development of highly stable BOTDR strain sensor employing microwave heterodyne detection and tunable electric oscillator,” in *Advanced Photonic Sensors and Applications II*, vol. 4596. International Society for Optics and Photonics, 2001, pp. 74–86.
- [249] K. Hotate and H. Arai, “Enlargement of measurement range of simplified BOCDA fiber-optic distributed strain sensing system using a temporal gating scheme,” in *17th International Conference on Optical Fibre Sensors*, vol. 5855. International Society for Optics and Photonics, 2005, pp. 184–188.
- [250] J. Fang, M. Sun, D. Che, M. Myers, H. Bao, C. Prohasky, and W. Shieh, “Complex Brillouin optical time-domain analysis,” *Journal of Lightwave Technology*, vol. 36, no. 10, pp. 1840–1850, 2018.
- [251] P. Walters, *An Introduction to Ergodic Theory*. Springer Science & Business Media, 2000, vol. 79.
- [252] P. Richter, “Estimating errors in least-squares fitting,” *The Telecommunications and Data Acquisition Progress Report 42-122*, p. 107, 1995.

- [253] M. A. Soto, J. A. Ramirez, and L. Thévenaz, “Intensifying the response of distributed optical fibre sensors using 2D and 3D image restoration,” *Nature Communications*, vol. 7, p. 10870, 2016.
- [254] H. S. Pradhan and P. Sahu, “Brillouin distributed strain sensor performance improvement using FourWaRD algorithm,” *Optik-International Journal for Light and Electron Optics*, vol. 127, no. 5, pp. 2666–2669, 2016.
- [255] W. Zou, Z. He, and K. Hotate, “Experimental study of Brillouin scattering in fluorine-doped single-mode optical fibers,” *Opt. Express*, vol. 16, no. 23, pp. 18 804–18 812, Nov 2008.
- [256] X. Bao, J. Dhliwayo, N. Heron, D. J. Webb, and D. A. Jackson, “Experimental and theoretical studies on a distributed temperature sensor based on Brillouin scattering,” *Journal of Lightwave Technology*, vol. 13, no. 7, pp. 1340–1348, 1995.
- [257] R. Bernini, L. Crocco, A. Minardo, F. Soldovieri, and L. Zeni, “All frequency domain distributed fiber-optic Brillouin sensing,” *IEEE Sensors Journal*, vol. 3, no. 1, pp. 36–43, 2003.
- [258] K. O. Hill and G. Meltz, “Fiber Bragg grating technology fundamentals and overview,” *Journal of Lightwave technology*, vol. 15, no. 8, pp. 1263–1276, 1997.
- [259] C. Roychoudhuri, “Response of Fabry–Perot interferometers to light pulses of very short duration,” *Journal of the Optical Society of America*, vol. 65, no. 12, pp. 1418–1426, 1975.
- [260] S. Liehr, N. Nöther, M. Steffen, O. Gili, and K. Krebber, “Performance of digital incoherent OFDR and prospects for optical fiber sensing applications,” in *23rd International Conference on Optical Fibre Sensors*, vol. 9157. International Society for Optics and Photonics, 2014, p. 915737.
- [261] X. Lu, M. A. Soto, M. G. Herraiez, and L. Thévenaz, “Brillouin distributed fibre sensing using phase modulated probe,” in *Fifth European Workshop on Optical Fibre Sensors*, vol. 8794. International Society for Optics and Photonics, 2013, p. 87943P.
- [262] D. M. Nguyen, B. Stiller, M. W. Lee, J.-C. Beugnot, H. Maillotte, A. Mottet, J. Hauden, and T. Sylvestre, “Distributed Brillouin fiber sensor with enhanced sensitivity based on anti-Stokes single-sideband suppressed-carrier modulation,” *IEEE Photonics Technology Letters*, vol. 25, no. 1, pp. 94 – 96, 2013.
- [263] A. Schreier, S. Liehr, A. Wosniok, and K. Krebber, “Comparison of solution approaches for distributed humidity sensing in perfluorinated graded-index polymer optical fibers,” in *Optical Sensors 2019*, vol. 11028. International Society for Optics and Photonics, 2019, p. 1102808.
- [264] S. Liehr, N. Nöther, and K. Krebber, “Incoherent optical frequency domain reflectometry and distributed strain detection in polymer optical fibers,” *Measurement Science and Technology*, vol. 21, no. 1, p. 017001, 2009.
- [265] A. Theodosiou, K. Kalli, and M. Komodromos, “Health monitoring of carbon cantilever using femtosecond laser inscribed FBG array in gradient-index CYTOP polymer fibre,” in *Optical Fiber Sensors Conference (OFS), 2017 25th*. IEEE, 2017, pp. 1–4.

- 
- [266] S. Liehr, P. Lenke, M. Wendt, and K. Krebber, “Perfluorinated graded-index polymer optical fibers for distributed measurement of strain,” in *17th International Conference on Plastic Optical Fibers (POF 2008)*, 2008.
- [267] W. Zhang, D. J. Webb, and G.-D. Peng, “Investigation into time response of polymer fiber Bragg grating based humidity sensors,” *Journal of Lightwave Technology*, vol. 30, no. 8, pp. 1090–1096, 2012.
- [268] X. Chen, W. Zhang, C. Liu, Y. Hong, and D. J. Webb, “Enhancing the humidity response time of polymer optical fiber Bragg grating by using laser micromachining,” *Optics Express*, vol. 23, no. 20, pp. 25 942–25 949, 2015.